

Flexalen® Heating PU SL


Pre-insulated PB piping system by Thermaflex®

High performance, pre-insulated plastic pipe system for heating applications



Benefits

- High insulation class for plastic pipe systems and perfect fit for low temperature heating networks
- Large network capacity with service pipes up to OD315mm
- Full compatibility with Flexalen® 600: combine high insulation class of main lines with the most flexible house connection lines
- Safest choice with homogeneous welding and high-pressure rating 95°C/8bar (depending on the diameter, see Flexalen® PU pressure rating), for increased reliability

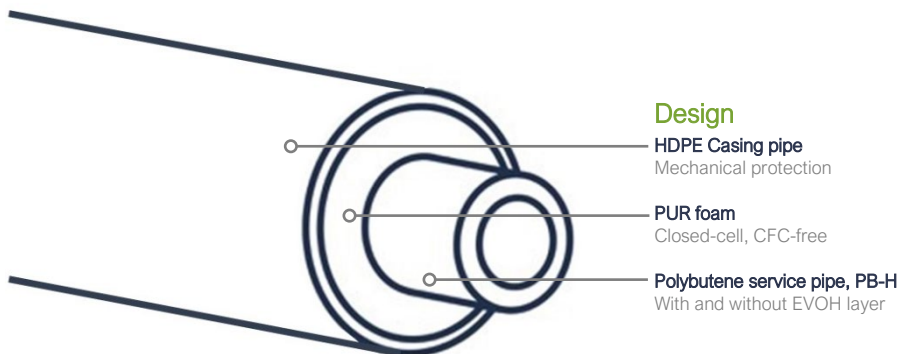

Technical Properties

Flexalen® PU SL is a pre-insulated plastic pipe system. The PB service pipes are conform to EN-ISO 15876. The PUR foam and HDPE casing pipe of the pre-insulated pipes fulfil the functional requirements according EN253.



PB-H service pipe (EN-ISO 15876)	
Service temperature	-10°C to +95°C
Max. operating pressure	<125 OD 8bar(95°C) >125 OD 5bar(95°C)
SDR-class	SDR11

Thermal Insulation	
PUR foam, CFC-free	
Closed-cell structure	
Thermal Conductivity $\lambda \leq 0.021 \text{ W/m}\cdot\text{K}$ @ 50°C	

Disclaimer

All recommendations and information provided on this data sheet are based on our knowledge and experience. Product specifications are intended as guidelines. Since conditions of service are beyond our control, users must satisfy themselves that products are suitable for the intended use. No guarantee or warranty is given or implied or that any use of the products will not infringe rights belonging to other parties. We reserve the right to change product design and properties without notification.

Heating Application



Flexalen® PU SL Heat losses

Calculation parameter


λ_{soil} :	1.00 W/m·K
R soil surface to ambient air:	0.0685 m ² ·K/W
T_{soil} :	10.0 °C
Soil covering:	0.8 m

The heat loss characteristics are in accordance with the European standard for flexible heating pipes systems EN15632.

Heat loss Q [W/m] for Flexalen® PU SL Single line										
Dimensions	U-value [W/mK]	Insulation Class	Insulation Series	Temperature difference [DT] between the waterflow in the pipe and surrounding ground [°C]						
				Q=U*DT [W/m]						
				DT=10	DT=20	DT=30	DT=40	DT=50	DT=60	DT=70
40 / 110	0.126	6	1	1.26	2.52	3.78	5.04	6.30	7.56	8.82
50 / 125	0.137	6	2	1.37	2.74	4.12	5.49	6.86	8.23	9.61
63 / 125	0.181	5	1	1.81	3.61	5.42	7.23	9.03	10.84	12.64
63 / 140	0.157	6	2	1.57	3.14	4.71	6.27	7.84	9.41	10.98
63 / 160	0.136	6	3	1.36	2.71	4.07	5.43	6.79	8.14	9.50
75 / 160	0.165	6	2	1.65	3.31	4.96	6.62	8.27	9.92	11.58
75 / 180	0.144	6	3	1.44	2.89	4.33	5.77	7.22	8.66	10.10
90 / 160	0.214	5	1	2.14	4.29	6.43	8.58	10.72	12.86	15.01
90 / 180	0.180	6	2	1.80	3.60	5.41	7.21	9.01	10.81	12.62
90 / 200	0.158	6	3	1.58	3.16	4.74	6.32	7.90	9.48	11.06
110 / 200	0.208	6	1	2.08	4.16	6.24	8.32	10.40	12.47	14.55
110 / 250	0.155	6	3	1.55	3.09	4.64	6.19	7.73	9.28	10.83
125 / 200	0.260	5	1	2.60	5.21	7.81	10.41	13.02	15.62	18.22
125 / 250	0.182	6	3	1.82	3.64	5.46	7.28	9.10	10.92	12.74
140 / 225	0.259	5	1	2.59	5.18	7.77	10.37	12.96	15.55	18.14
140 / 280	0.182	6	3	1.82	3.65	5.47	7.30	9.12	10.94	12.77
160 / 250	0.276	5	1	2.76	5.52	8.28	11.03	13.79	16.55	19.31
160 / 280	0.224	6	2	2.24	4.47	6.71	8.95	11.18	13.42	15.66
160 / 315	0.187	6	3	1.87	3.74	5.61	7.48	9.34	11.21	13.08
225 / 315	0.361	5	1	3.61	7.23	10.84	14.46	18.07	21.69	25.30
225 / 400	0.217	6	3	2.17	4.34	6.50	8.67	10.84	13.01	15.18
315 / 450	0.336	6	1	3.36	6.73	10.09	13.45	16.82	20.18	23.54

Heat loss Q [W/m] for Flexalen® PU SL Double lines								
Dimensions	U-value [W/mK]	Insulation class	Temperature difference[DT] between the average waterflow in the pipes and surrounding soil [°C]					
			Q=U*DT [W/m]					
			DT=10	DT=20	DT=30	DT=40	DT=50	DT=60
25+25 / 110	0.167	6	1.67	3.34	5.01	6.68	8.35	10.02
32 + 32 / 125	0.182	6	1.82	3.65	5.47	7.30	9.12	10.95
40 + 40 / 140	0.208	6	2.08	4.15	6.23	8.31	10.38	12.46
50 + 50 / 180	0.188	6	1.88	3.77	5.65	7.53	9.42	11.30
63 + 63 / 200	0.226	6	2.26	4.52	6.79	9.05	11.31	13.57
75+75 / 250	0.203	6	2.03	4.06	6.09	8.12	10.15	12.18
90+90 / 280	0.234	6	2.34	4.68	7.02	9.36	11.70	14.04
25+25 / 160	0.110	6	1.10	2.21	3.31	4.41	5.51	6.62
32+32 / 180	0.119	6	1.19	2.38	3.57	4.76	5.95	7.14
40+40 / 200	0.129	6	1.29	2.59	3.88	5.18	6.47	7.76
50+50 / 200	0.162	6	1.62	3.24	4.86	6.48	8.10	9.72
63+63 / 250	0.159	6	1.59	3.18	4.78	6.37	7.96	9.55
75+75 / 280	0.171	6	1.71	3.41	5.12	6.82	8.53	10.23
90+90 / 315	0.189	6	1.89	3.78	5.67	7.56	9.45	11.34


Flexalen® PU SL Pressure rating

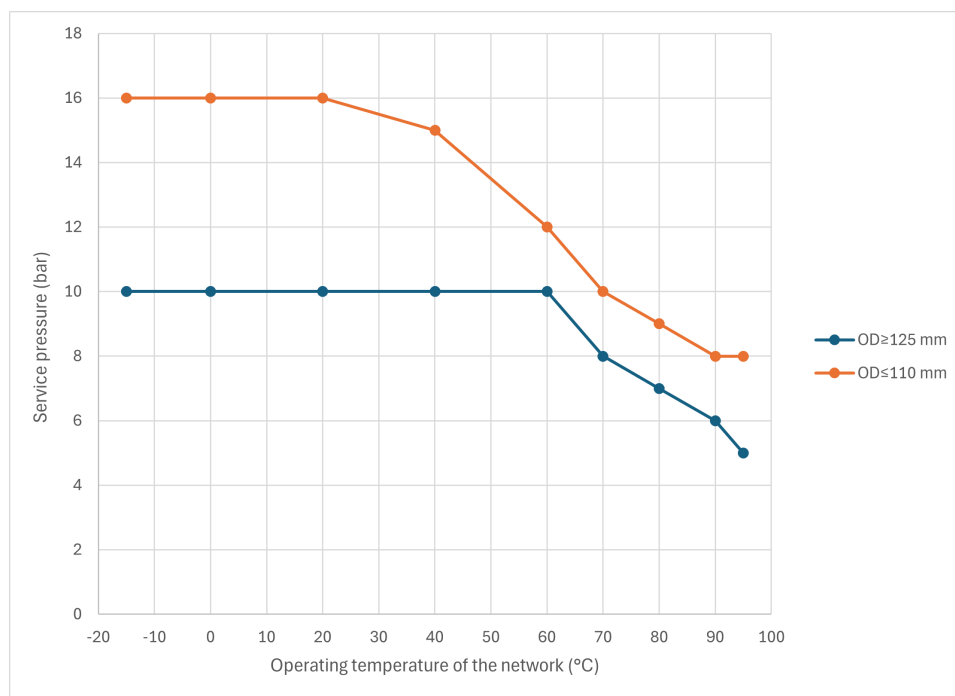

Flexalen® PU SL Pressure drop PB

Determine the pressure drop using Flexalen pipe systems **at a flow temperature of 90°C** (Flow line). For lower medium temperatures the pressure drop is higher.

For support on a complete district heating network design please contact your Thermaflex partner!

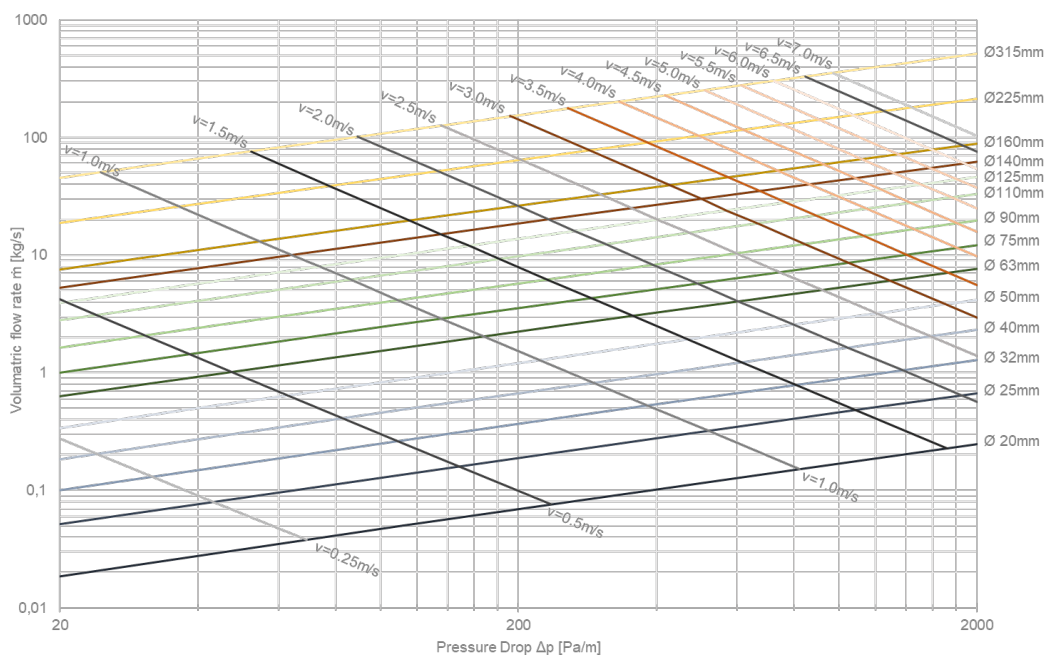



Availability

- Single lines in sticks, Flexalen PU SL OD63-315 mm with smooth casing pipe
- Double lines in sticks, Flexalen PU SL OD25-90 mm with smooth casing pipe



Single line					
Product code	Dimension [mm]	Service pipe OD x s [mm]	Casing pipe OD, s [mm]	Weight [kg/m]	Max. length [m]
With or without Oxygen Barrier					
1921-110040-015	40 / 110	40 x 3.7	110, 3.4	1.85	5.8
1921-125050-015	50 / 125	50 x 4.6	125, 3.1	2.24	5.8
1921-140063-015	63 / 140	63 x 5.8	140, 3.5	2.98	5.8
1921-140063-030	63 / 140	63 x 5.8	140, 3.5	2.98	11.8
1921-160063-015	63 / 160	63 x 5.8	160, 4.0	3.65	5.8
1921-160063-030	63 / 160	63 x 5.8	160, 4.0	3.65	11.8
1921-160075-015	75 / 160	75 x 6.8	160, 4.0	3.98	5.8
1921-160075-030	75 / 160	75 x 6.8	160, 4.0	3.98	11.8
1921-180075-015	75 / 180	75 x 6.8	180, 4.4	4.70	5.8
1921-180075-030	75 / 180	75 x 6.8	180, 4.4	4.70	11.8
1921-180090-015	90 / 180	90 x 8.2	180, 4.4	5.19	5.8
1921-180090-030	90 / 180	90 x 8.2	180, 4.4	5.19	11.8
1921-200090-015	90 / 200	90 x 8.2	200, 4.9	6.03	5.8
1921-200090-030	90 / 200	90 x 8.2	200, 4.9	6.03	11.8
Without Oxygen Barrier					
1920-125063-030	63 / 125	63 x 5.8	125, 3.1	2.53	11.8
1920-160075-030	75 / 160	75 x 6.8	160, 4.0	3.98	11.8
1920-160090-030	90 / 160	90 x 8.2	160, 4.0	4.47	11.8
1920-200110-030	110 / 200	110 x 10.0	200, 4.9	6.83	11.8
1920-250110-030	110 / 250	110 x 10.0	250, 6.2	9.37	11.8
1920-200125-030	125 / 200	125 x 11.4	200, 4.9	7.54	11.8
1920-250125-030	125 / 250	125 x 11.4	250, 6.2	9.04	11.8
1920-225140-030	140 / 225	140 x 12.7	225, 5.5	10.08	11.8
1920-280140-030	140 / 280	140 x 12.7	280, 6.9	12.61	11.8
1920-250160-030	160 / 250	160 x 14.6	250, 6.2	12.07	11.8
1920-280160-030	160 / 280	160 x 14.6	280, 6.9	13.80	11.8
1920-315160-030	160 / 315	160 x 14.6	315, 7.7	16.07	11.8
1920-315160-015	160 / 315	160 x 14.6	315, 7.7	16.07	5.8
1920-315225-030	225 / 315	225 x 20.5	315, 7.7	21.1	11.8
1920-315225-015	225 / 315	225 x 20.5	315, 7.7	21.1	5.8
1920-400225-010	225 / 400	225 x 20.5	400, 8	25.97	5.8
1920-450315-005	315 / 450	315 x 28.6	450, 8	38.73	3

Double lines with/without Oxygen Barrier					
Product code	Dimension [mm]	Service pipe OD x s [mm]	Casing pipe OD,s [mm]	Weight [kg/m]	Max. length [m]
1922-110025-015	25 + 25 / 110	25 x 2.3	110, 2.7	1.74	5.8
1922-160025-015	25 + 25 / 160	25 x 2.3	160, 4.0	2.75	5.8
1922-125032-015	32 + 32 / 125	32 x 2.9	125, 3.1	2.21	5.8
1922-180032-015	32 + 32 / 180	32 x 2.9	180, 4.4	3.41	5.8
1922-140040-015	40 + 40 / 140	40 x 3.7	140, 3.5	2.81	5.8
1922-200040-015	40 + 40 / 200	40 x 3.7	200, 4.9	4.31	5.8
1922-180050-015	50 + 50 / 180	50 x 4.6	180, 4.4	4.14	5.8
1922-200050-015	50 + 50 / 200	50 x 4.6	200, 4.9	4.75	5.8
1922-200063-015	63 + 63 / 200	63 x 5.8	200, 4.9	5.47	5.8
1922-250063-015	63 + 63 / 250	63 x 5.8	250, 6.2	7.18	5.8
1922-250075-015	75 + 75 / 250	75 x 6.8	250, 6.2	7.95	5.8
1922-280075-015	75 + 75 / 280	75 x 6.8	280, 6.9	9.18	5.8
1922-280090-015	90 + 90 / 280	90 x 8.2	280, 6.9	10.40	5.8
1922-315090-015	90 + 90 / 315	90 x 8.2	315, 7.7	11.86	5.8

- Prefabricated house connections
- All types of homogenous plastic welded **Prefabrications**
- Full range of weldable **PB fittings**
- **Compression fitting system**
- Full range of accessories and tools

