
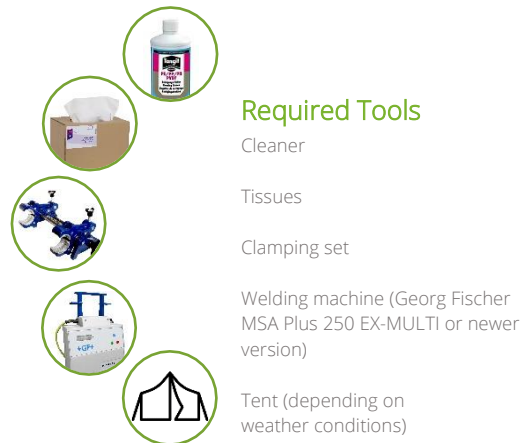


# Electrofusion Fittings 125-225

Weldable fitting system for Flexalen® polybutene service pipes (PB-H) OD125, 160 and 225

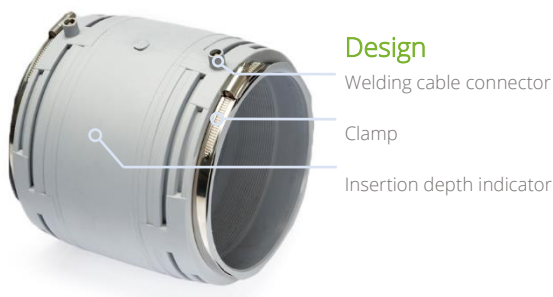

## Application Instruction

### Application conditions and pipe preparation

- Ambient temperature: +5 to +40°C
- No rainy or windy ( $\geq 3$  bfr / 3.4-5.4 m/s) weather conditions
- Service pipe is cut straight and without damage, upper layer of the medium pipe is removed for the length of the insertion depth (see instruction leaflet for Georg Fischer scraper)
- Service pipe and fitting are free from dirt and condensation

} use a tent to create correct conditions if not already given

**IMPORTANT: FOR WELDING PROCESS ALWAYS FOLLOW THE INSTRUCTIONS SUPPLIED WITH THESE FITTINGS AND THE SCRAPER SET**

### Disclaimer

All recommendations and information provided on this instruction leaflet are based on our knowledge and experience. Product specifications are intended as guidelines. Since conditions of service are beyond our control, users must satisfy themselves that products are suitable for the intended use. No guarantee or warranty is given or implied or that any use of products will not infringe rights belonging to other parties. We reserve the right to change product design and properties without notification.