


Annular Space Sealing

Water-tight seal for wall entries of pre-insulated pipes
Flexalen®

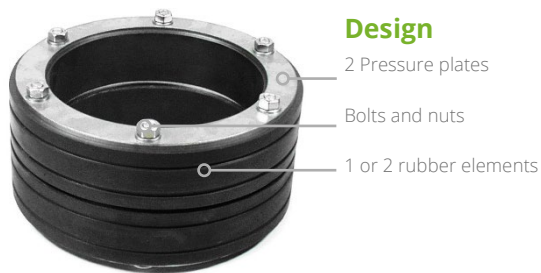

Required Tools

Cleaner

Tissues


Torque wrench

Application Instruction

Application conditions and pipe preparation


- Wall / foundation must be strong enough for the hole needed for the annular space sealing
- Transit and outer casing are undamaged and free from dirt and moisture

Item Code	Casing pipe OD [mm]	Cored hole D [mm]	H [mm]
1760-090150-000	90-91	150	80
1760-110200-000	110-111	200	80
1760-125200-000	125-126	200	80
1760-140200-000	140-142	200	80
1760-160250-000	160-162	250	80
1760-180250-000	180-182	250	80
1760-200250-000	200-202	250	80
1760-225300-000	225	300	80
1760-250350-000	250	350	80
1760-315400-000	315	400	80
1760-450600-000	450	600	80



01.

Drill a hole in the wall. If sleeving the hole with a PVC pipe sleeve, create a hole larger than the PVC pipe sleeve diameter. If not using a PVC pipe sleeve, then simply drill the hole according to the required value (see table above).




05.

Feed the pipe with the annular space sealing in place through the hole in the wall.

02.

Cut the PVC pipe sleeve to the required wall thickness. Insert the PVC pipe sleeve and seal in place with mortar.

Attention! Follow the instruction from the PVC pipe supplier.




06.

Position the annular space sealing level with the outside face of the wall.

03.

Seal the inside surface of the PVC pipe sleeve or core-drilled hole (if not using PVC pipe sleeve) with epoxy resin.



07.

Tighten the nuts clockwise (starting at 12 o'clock) by using a torque wrench.

04.

Clean the outer casing of the pre-insulated pipe and make sure it is undamaged. Fit the annular space sealing on the casing. The annular space sealing nuts must face the inside of the building unless access is restricted.

Bolt size	Max. tightening moment [Nm]
M6	5
M8	8
M10	22
M12	26

Attention! The nuts must be tightened gradually with a maximum of 2-3 turns at a time. Repeat this process until the correct tightening torque is reached (see table above). After 2 hours tighten all nuts again with the correct tightening torque.

Disclaimer

All recommendations and information provided on this data sheet are based on our knowledge and experience. Product specifications are intended as guidelines. Since conditions of service are beyond our control, users must satisfy themselves that products are suitable for the intended use. No guarantee or warranty is given or implied or that any use of the products will not infringe rights belonging to other parties. We reserve the right to change product design and properties without notification.