



No. 11/1/B/2021

- |   |   |
|---|---|
| 1. Unique identification code of the product-type:  | <b>ThermaSmart PRO SA sheet</b> PEF – EN 14313 – ST(+) <b>95</b> – WS005  |
| 2. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: | Thermal insulation for building equipment and industrial installations  |
| 3. Manufacturer:  | Thermaflex Izolacji Sp. z o.o., 58 – 130 Żarów, Poland<br>E-mail: <a href="mailto:biuro@thermaflex.com">biuro@thermaflex.com</a><br>Tel: +48 74 858 96 66<br>System 1 |
| 4. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:                          |   |
| 5. Harmonized standard:   | PN-EN 14313+A1:2013-07  |
| 6. Notified body or bodies:   | 1454 Łukasiewicz Research Network - Institute of Mechanization of Construction and Rock Mining, Branch in Katowice  |
| 7. Declared performance:  |   |


## Declared performance

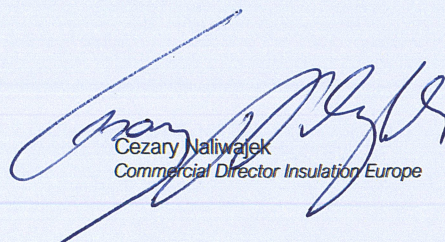
Essential characteristics	Performance	Harmonized technical specification
Reaction to fire Euroclass Characteristics	Reaction to fire: <b>B-s2, d0</b>	
Acoustic absorption index	Structure-borne sound transmission: <b>NPD</b> Sound absorption: <b>NPD</b>	
Thermal resistance	<b>Thermal conductivity (<math>\lambda</math>):</b> Average Temperature [°C]      -80    -30    20    40    75    95 $\lambda$ [W/mK]                      0,025 0,030 0,036 0,038 0,044 0,047	
Water permeability	Water absorption: <b>WS005</b>	
Water vapour permeability	Water vapour diffusion resistance: <b>NPD</b>	
Compressive strength	Compressive strength is not applicable for products made of polyethylene foam	
Rate of release of corrosive substances	Trace quantities of water soluble ions and pH-value: <b>NPD</b>	
Release of dangerous substances to the indoor environment	Release of dangerous substances: <b>NPD</b>	PN-EN 14313+A1:2013-07
Continuous glowing combustion	Continuous glowing combustion: <b>NPD</b>	
Durability of reaction to fire against ageing/ degradation	Durability characteristics	
Durability of thermal resistance to fire against ageing/ degradation	Thermal conductivity Dimensions and tolerances Dimensional stability Durability characteristics Maximum service temperature: <b>ST(+)<b>95</b></b> Minimum service temperature	They do not change with time - proven according to the point 4.2.5 EN 14313:2009 + A1:2013
Durability of reaction to fire against high temperature	Durability characteristics	
Durability of thermal resistance to fire against high temperature	Durability characteristics Maximum service temperature – dimensional stability: <b>ST(+)<b>95</b></b>	

## 8. Declaration

The performance of the product specified above is in accordance with the declared performance. This declaration of performance is issued in accordance with Regulation (EU) No. 305/2011 and is the sole responsibility of the abovementioned manufacturer.

Signed on behalf of the manufacturer:  
Żarów, 17<sup>th</sup> October 2023

  
Janusz Tichoniuk  
Managing Director

  
Cezary Naliwajek  
Commercial Director Insulation Europe